

the power of tomorrow

CLEAN ENERGY DEFINES THE WORLD THAT WE LIVE IN TODAY AND TOMORROW.
LEAD CRYSTAL® TECHNOLOGY CREATES POWER THAT IS CLEAN SAFE AND
HIGH PERFORMING FOR A BETTER FUTURE

**LEAD
CRYSTAL®
BATTERIES**

POWERED BY
Betta Batteries



DISCHARGE CURRENT AND END VOLTAGE

Discharge current (A)	End voltage (V)
0.05C or below or Intermittent discharge	1.9
0.05C of current close to it	1.85
0.1C of current close to it	1.8
0.2C of current close to it	1.75
From 0.2C to 0.5C	1.7
From 0.5C to 1C	1.6
From 1C to 3C	1.5
Current in excess of 3C	1.3

SPECIFICATION

Nominal Voltage	2V		
Rated Capacity (10 hour rate)	300 AH		
Dimension	Total Height (top of terminal)	335 mm	13.19"
	Height	330 mm	12.99"
	Length	176 mm	6.93"
	Width	154 mm	6.06"

Weight	Approximately 22 kg / 48.50 lbs		
--------	------------------------------------	--	--

Capacity 25° C	120 hour rate (3.0A)	360 AH
	20 hour rate (16.5A)	330 AH
	10 hour rate (30A)	300 AH


Internal Resistance	Fully charged Battery (25° C)	0.45mΩ
---------------------	-------------------------------	--------

Self-Discharge 25° C	Capacity after 3 month storage	95%
	Capacity after 6 month storage	85%
	Capacity after 12 month storage	80%

Max Discharge Current 25° C	3000A (5S)
--------------------------------	------------

Terminal	Standard	F4
	Optional	
Charging (Constant Voltage)	Cycle	Initial Charging Current 90A 2.45V/ (25° C)
	Float	2.27V/ (25° C)

CHARGE vs TEMPERATURE

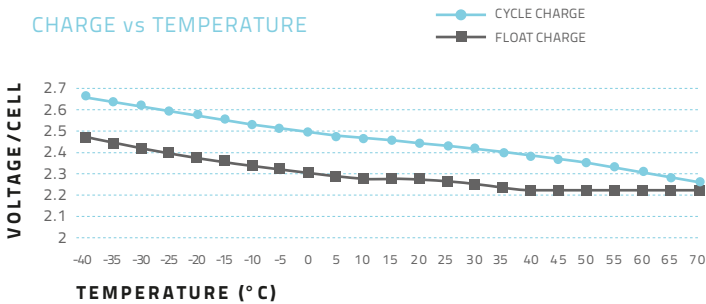

CHARGE vs TEMPERATURE CHART

temperature	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70
Cycle Charge	2.66	2.64	2.62	2.60	2.58	2.56	2.54	2.52	2.50	2.48	2.47	2.47	2.45	2.45	2.43	2.41	2.39	2.37	2.35	2.33	2.31	2.29	2.27
Float Charge (voltage/cell)	2.46	2.44	2.42	2.40	2.38	2.36	2.34	2.32	2.31	2.30	2.29	2.29	2.29	2.27	2.26	2.24	2.23	2.23	2.23	2.23	2.23	2.23	2.23

CONSTANT CURRENT DISCHARGE CHARACTERISTICS: UNITS AMPERES (25° C)

End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	810.72	517.20	340.80	256.50	209.70	125.10	90.90	70.65	60.00	51.60	39.00	31.50	26.55	16.59	13.90
1.67V	697.79	468.90	315.90	243.00	203.10	119.40	86.40	69.90	57.00	51.00	38.40	30.90	26.55	16.59	13.90
1.70V	666.61	454.50	306.00	240.00	196.20	117.60	84.60	69.30	56.70	50.70	38.10	30.60	26.55	16.56	13.86
1.75V	605.99	425.40	294.00	230.70	189.90	113.10	82.20	67.50	54.90	49.50	37.50	30.30	26.31	16.56	13.83
1.80V	535.79	389.70	282.90	222.30	181.80	109.20	81.00	66.30	53.70	48.30	36.60	30.00	25.74	16.50	13.77
1.83V	467.71	356.10	261.30	206.60	171.90	104.40	78.00	63.60	51.30	46.50	35.40	29.10	25.05	16.44	13.38
1.85V	399.89	322.50	240.00	191.10	162.30	99.90	75.00	61.20	49.20	45.00	34.20	28.29	24.33	16.41	12.99

DISCHARGE DATA WITH CONSTANT POWER UNITS: WATTS PER CELL (25° C)



End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	1344.29	905.10	619.50	472.20	391.20	238.80	174.00	135.29	115.20	101.10	76.50	62.35	52.20	32.40	27.18
1.67V	1200.89	843.90	579.90	451.80	381.00	231.36	169.80	134.70	111.60	99.90	74.99	60.90	52.20	32.40	27.18
1.70V	1162.17	821.99	564.00	447.00	370.20	225.30	162.90	133.80	109.50	99.30	74.74	60.30	52.20	32.40	27.15
1.75V	1072.81	772.79	545.40	433.20	360.00	217.81	159.00	131.70	106.80	97.80	73.20	59.69	52.20	32.40	27.12
1.80V	972.60	712.20	526.79	419.40	346.50	210.60	157.20	129.31	104.10	96.30	72.00	59.10	50.70	32.10	27.06
1.83V	858.91	659.39	492.00	393.00	329.10	202.80	151.80	125.10	100.50	93.60	69.60	57.60	49.50	32.10	26.37
1.85V	745.20	606.58	457.20	366.60	312.00	195.00	146.40	120.60	96.60	90.90	67.20	56.10	48.30	31.80	25.71

CYCLE CHARGE CHARACTERISTIC (25°C)

FLOATING CHARGE CHARACTERISTIC (25°C)

REGULAR CYCLE CHARGE CHARACTERISTICS 77°F (25°C)



FLOATING CHARGE CHARACTERISTICS 77°F (25°C)

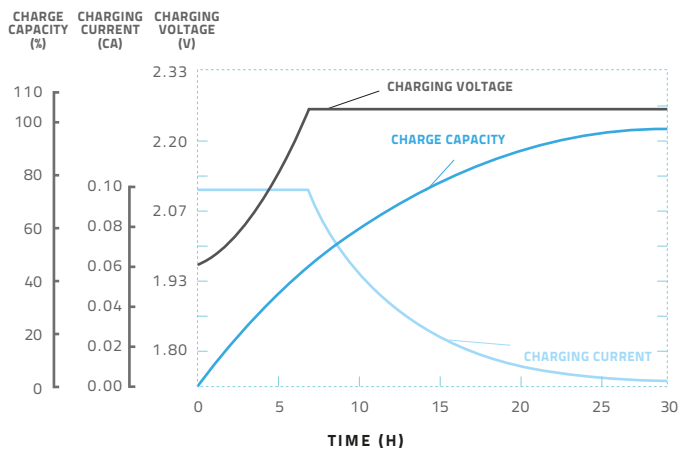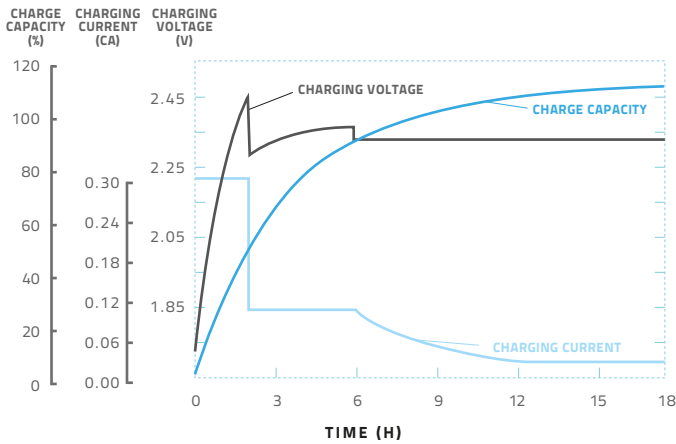

CYCLE LIFE CURVE GRAPH



CYCLE LIFE CURVE GRAPH (25°C)

CYCLE LIFE CURVE GRAPH (40°C)

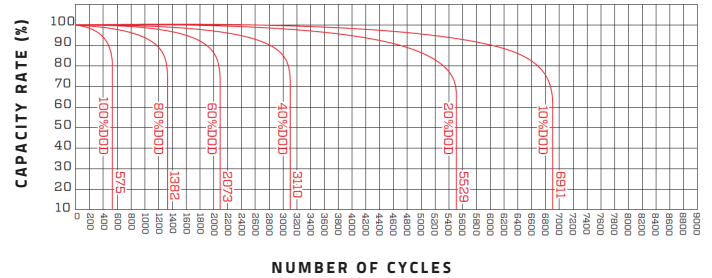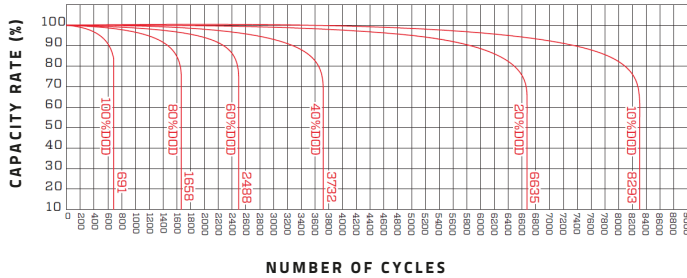


TEMPERATURE & FLOAT SERVICE LIFE

FLOAT SERVICE LIFE CURVE GRAPH

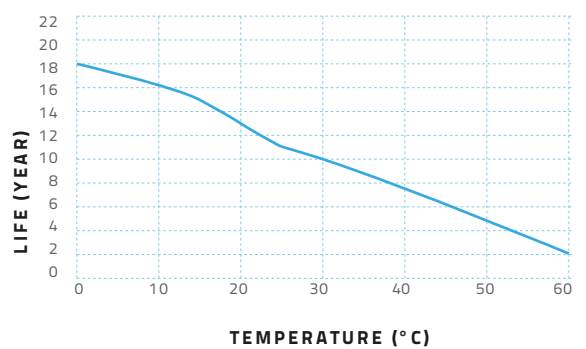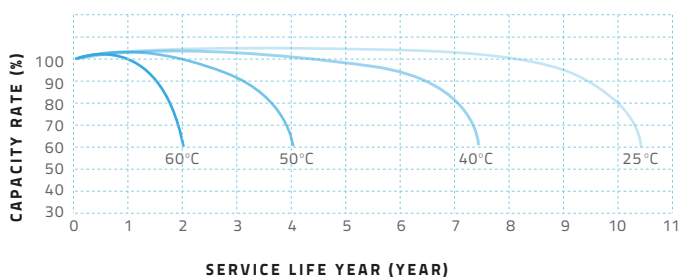

TEMPERATURE & DISCHARGE CAPACITY

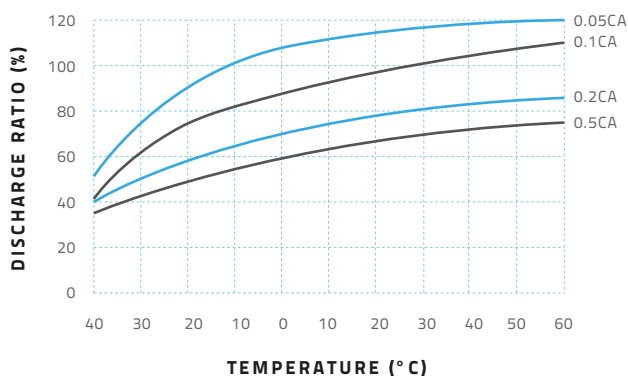

CNFJ-300 2V/300Ah

LEAD CRYSTAL®: CHANGING THE FUTURE

Performance Robust, resilient, high performing. Lead Crystal® batteries can be discharged deeper, cycled more often (also in extreme temperatures) and have a longer service life. They recover to full rated capacity over and over again.

Technology A unique micro-porous high absorbent mat (AGM), high-purity lead calcium selenium plates, safe SiO₂ electrolyte solution that solidifies into a white crystalline powder when charged/discharged.

Cleaner & safe Less acid, no cadmium, no antimony. Lead Crystal® batteries are up to 99% recyclable and are classified as non-hazardous goods for transport.

Markets Lead Crystal® batteries are being used in telecoms, ups, petrochem/marine, defence, renewable energy, health care, manufacturing, transportation and electric motion (wheelchairs, golf carts & trolleys).



www.leadcrystalbatteries.com